



FCLG appointed
RS Response to deliver
a **modern, functional
workspace** of their new
extended offices in Bicester
with **stunning results**



RS Response completed the Office Fit-Out whilst staff worked in the same office, keeping people safe in their working environment.



Office Fit-Out

Project Length: 12 week programme

Size: 382 Square Metres

About FCLG

FCLG is a leading provider of specialist fleet management, motor claims and vehicle support services, working with vehicle manufacturers and fleet operators across the UK from its headquarters in Bicester.

By combining experienced people, in-house technology and detailed operational insight, FCLG helps clients reduce costs, improve driver experience, maintain control of their vehicle fleets and streamline complex administrative processes. Its flexible, customer-focused approach has established FCLG as a trusted long-term partner, delivering reliable, scalable solutions designed around the specific needs of each client.

The FCLG Fit-Out was
completed in 12 weeks
whilst working in **an occupied**
building and ensuring
our project delivery didn't
interfere with the client's day
to day operations

Scope of Works

- Internal Strip-Out and Soft Demolition
- Enabling and Builders Works
- Structural Steelwork Installation
- First Fix Mechanical and Electrical Services
- Metal Stud Partitioning
- Tape, Jointing and Plastering
- Ceiling Installation
- Second Fix Mechanical and Electrical Services
- Mechanical Air Conditioning and Ventilation Systems
- Concrete Floor Preparation
- Wall and Floor Tiling
- IPS Panelling
- Kitchen Installation
- Bespoke Joinery
- Bespoke Pressed Metalwork
- Glass Partitioning
- Manifestation Graphics
- Fire Stopping
- Decorations
- Wall Finishes
- Floor Finishes

Challenges

Working in an occupied building and ensuring our operations didn't interfere with the client day to day operations. Although the project was not a large project, its value was high due to the level of details required in such a small area. There were changes to the design and finishes, along with multiple variations and we still needed to remain on schedule.



Tape, Jointing and Plastering

Following completion of the partitioning works, all plasterboard joints were taped and jointed, with plastering undertaken where required to achieve a smooth, high-quality finish ready for decoration.






Kitchen Installation

New kitchen facilities were installed, including bespoke cabinetry, worktops, appliances, sinks, plumbing connections, electrical supplies and associated finishes to provide modern staff welfare facilities.



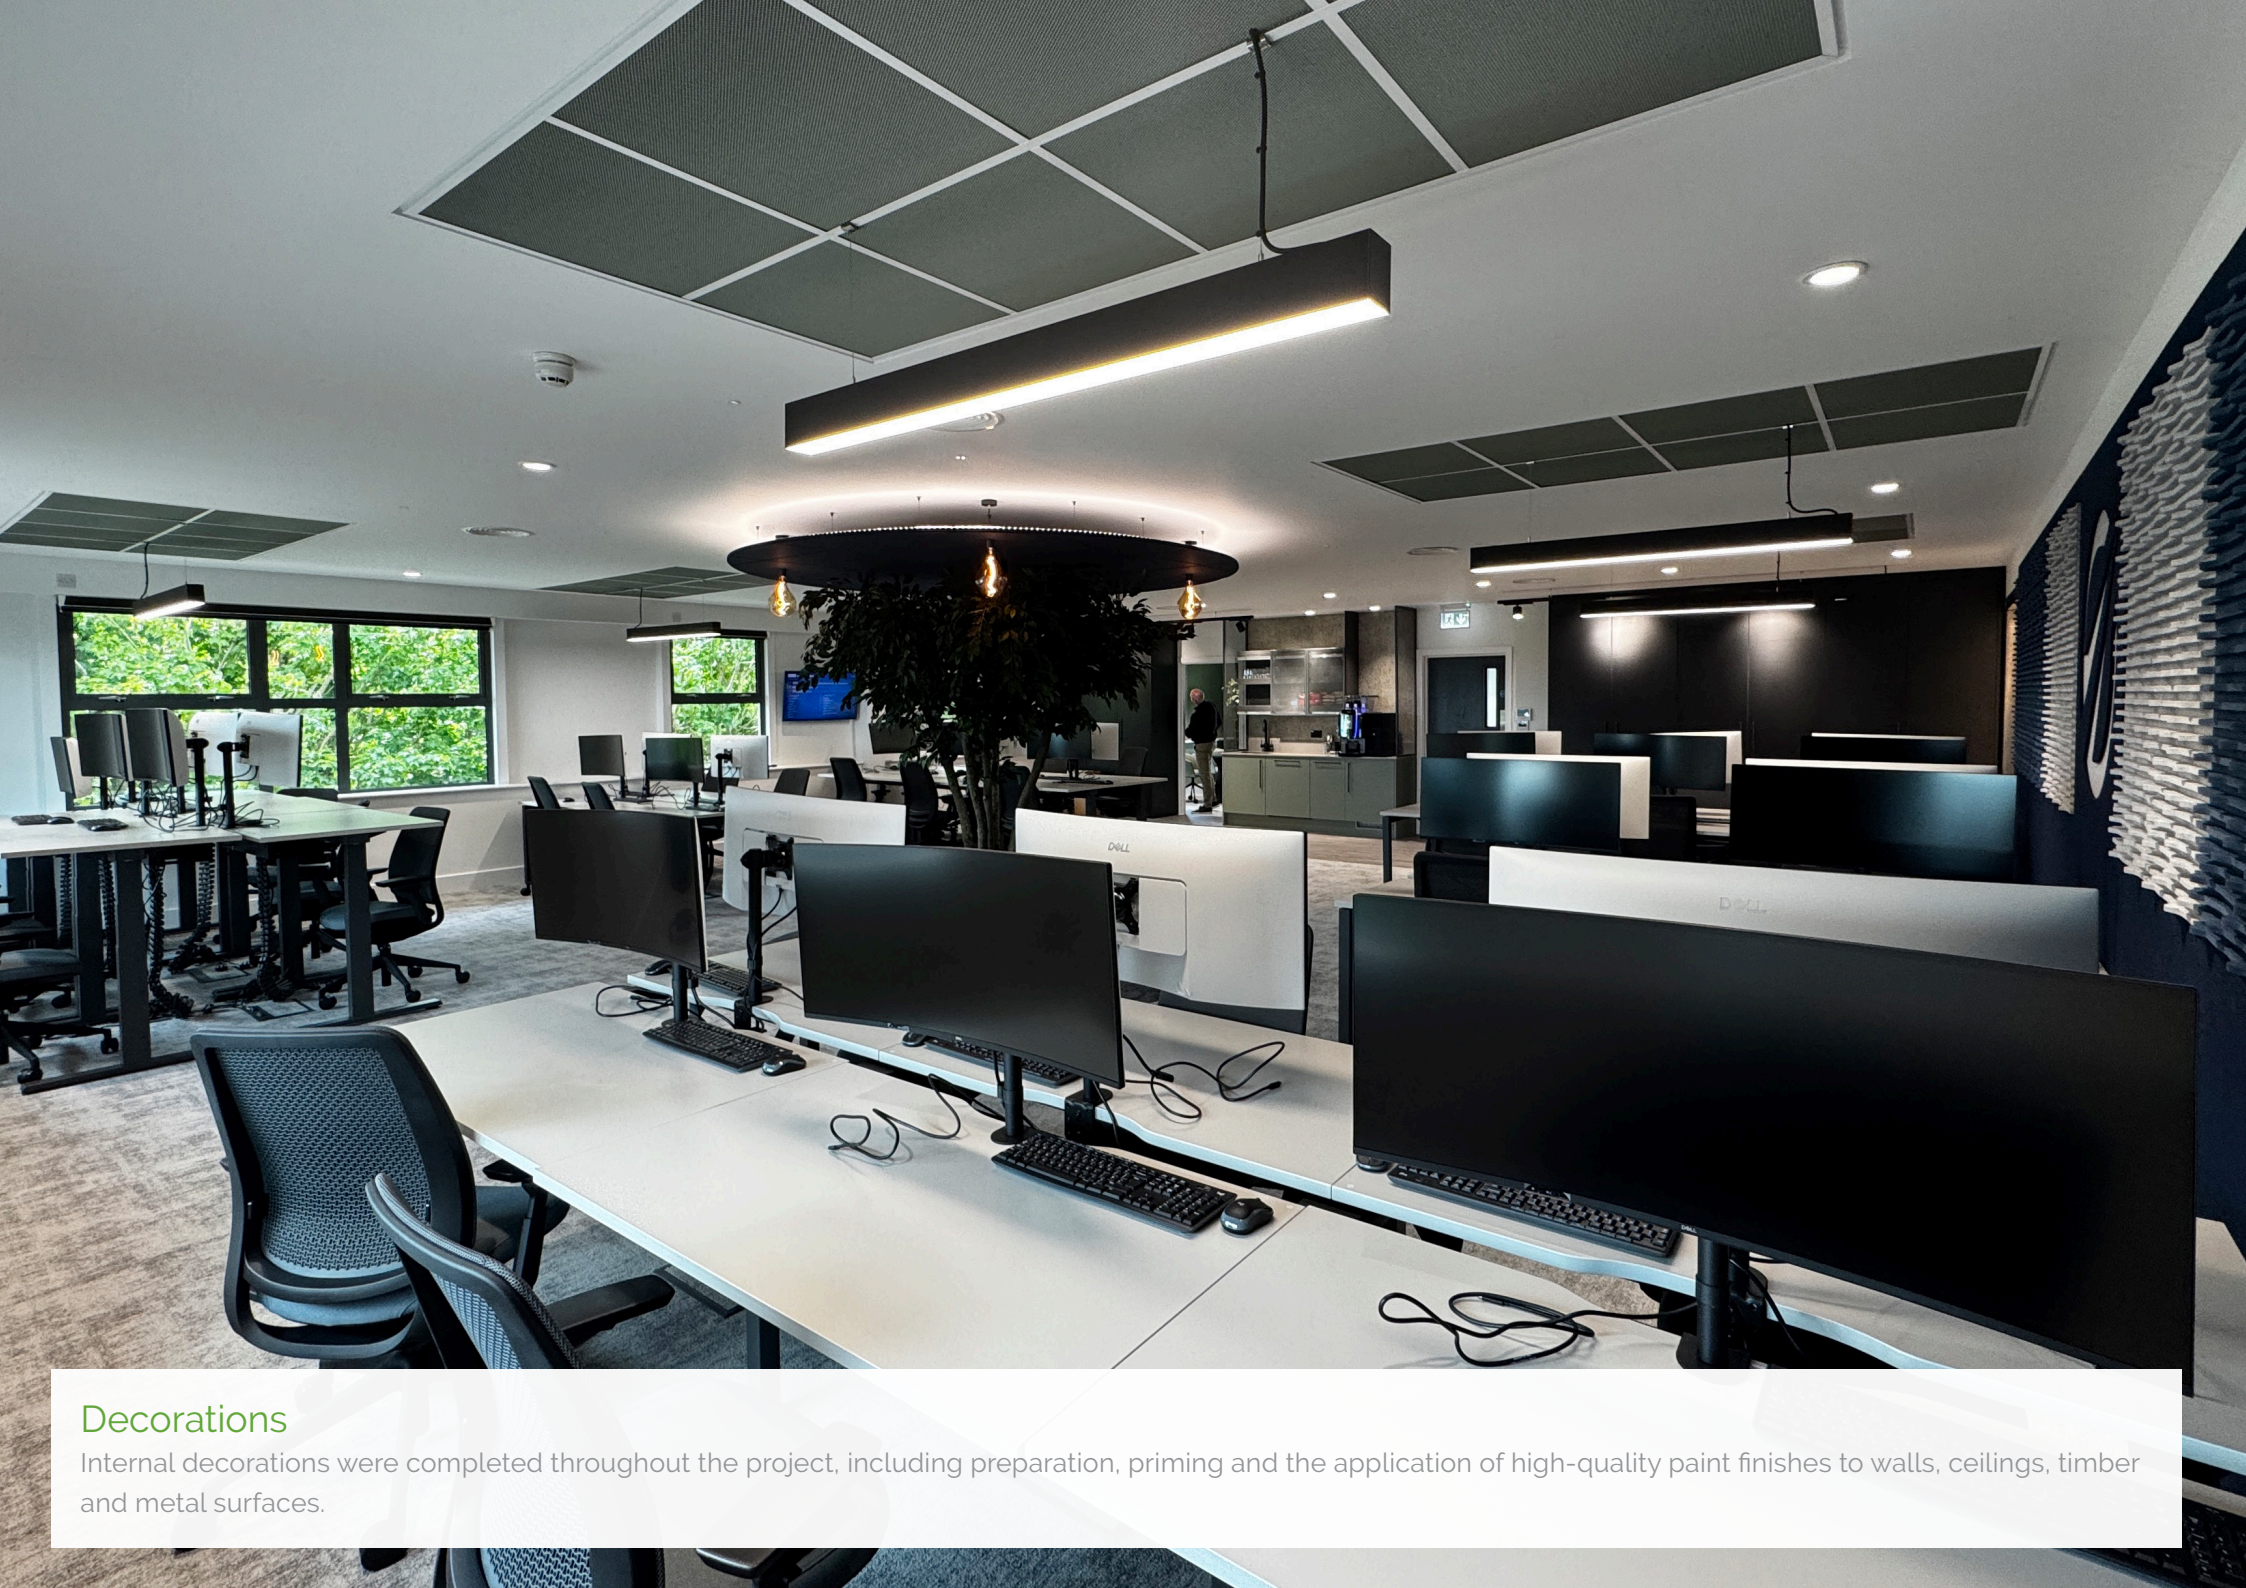

Decorations

Internal decorations were completed throughout the project, including preparation, priming and the application of high-quality paint finishes to walls, ceilings, timber and metal surfaces.



Floor Finishes

The project was completed with the installation of a range of commercial floor finishes, including carpet tiles, luxury vinyl tile (LVT) and sheet vinyl flooring, selected to suit the operational and aesthetic requirements of each individual space.



Riley



Glass Partitioning

Glazed partition systems, including both fixed glazed screens and bi-folding glass partitions, were installed to create flexible meeting spaces while maximising natural light throughout the office environment.





Bespoke Joinery

A comprehensive package of bespoke joinery was designed, manufactured and installed throughout the office. This included feature storage units, integrated cupboards, steel mesh walls, banquette seating tables and chairs, and other fitted joinery elements.



BEFORE



AFTER



Design | Build | Maintain

☎ 01908 218830

🌐 www.rsr.co.uk

✉ info@rsr.co.uk

📍 Lumen House Rockingham Drive Linford Wood Milton Keynes MK14 6LY